



ADDENDUM # 1

DATE: **September 3, 2026**

PROJECT: Green Road Community Center HVAC Renovations
IMEG #25007326.01
City of Raleigh # 274-ESIFS-GRHVR-2021

BID DUE DATE: **September 22, 2026 at 1:00 PM**

ENGINEER: IMEG Consultants Corp.
3221 Blue Ridge Road, Suite 113
Raleigh, NC 27612

TO: All Contract Document Holders of Record.




This Addendum forms a part of the bidding and construction documents. This Addendum supersedes and supplements all portions of the original bidding and construction documents dated **August 13, 2026**, with which it conflicts. Please attach this Addendum to the Project Manual(s) in your possession.

ACKNOWLEDGE RECEIPT OF THIS ADDENDUM IN THE SPACE PROVIDED ON THE BID FORM. FAILURE TO DO SO MAY SUBJECT BIDDER TO DISQUALIFICATION.

1. Contractor shall provide pre-work air test for airflow for all existing equipment to be replaced. A certified TAB report shall be provided at conclusion of construction.
2. See attached Sheet E-1, previously not included in drawing set.
3. Contractor shall have 30 days upon start of construction for new units to start moving air and 60 day after start of construction for all units to be under control.
4. Owens Roofing is the roofing contractor that installed the last roof.
5. Existing fabric ductwork in the gym shall be removed and cleaned and reinstalled.
6. Ductwork for X-RTU-4 **shall not** be cleaned as part of this contract.
7. Electrical disconnects for all existing equipment to be replaced shall be replaced with new heavy duty fusible type. Do not reuse existing electrical disconnects.
8. Gas line connections to new units shall provide new gas valve, dirt leg and regulator.
9. See note on page M-3 for base bid scope of work for new air distribution. Contractor shall be responsible for removing and reinstalling ceiling grid and tile as required for installation of new work.

10. New packaged HVAC equipment shall come with factory BACnet IP control interface. New split system shall be controlled by new BACnet IP controller. Existing AC-4 shall use existing BACnet MSTP connection to new controls.
11. See Section 230900,1.13,E for acceptable BAS Integrators. Mechanical Contractor refers to Mechanical Contractors Incorporated, MCI.
12. Units supplied by the contractor shall match or required less amps than currently specified. Equipment by Carrier or Daikin is allowed. If electrical demand is more than currently provided then the contractor shall bear the costs of reworking electrical wiring.
13. See photos of MDP panel that was not accessible during today's meeting.



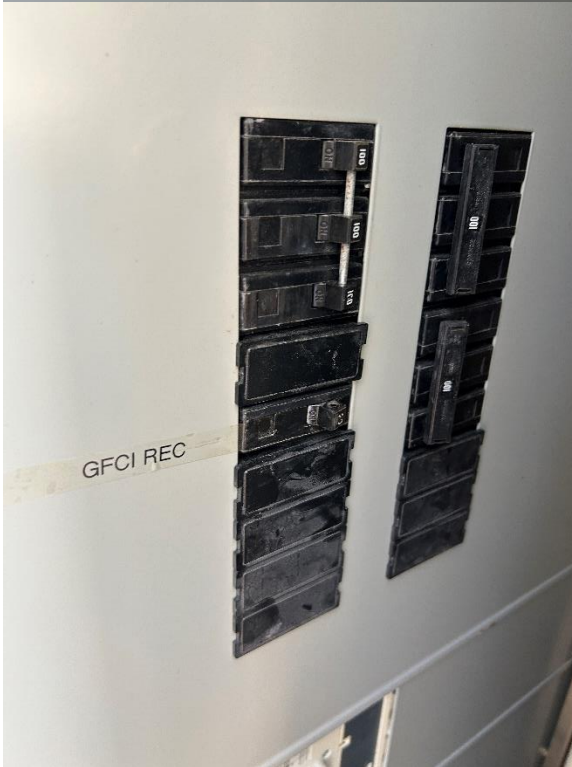





END OF ADDENDUM 1

\\files\Active\Projects\2025\25006703.00\BidPhase\20260320 Addendum 1.docx

Attachments: Sheet E-1

Green Road Community Center
IMEG # 25007326.01

Addendum # 1

Page 5 of 5