

SYMBOL LEGEND		
SYMBOL	DESCRIPTION	REMARKS
	JUNCTION BOX SIZED PER NEC.	
	DISCONNECT SWITCH SEE PLANS FOR SIZE AND TYPE	SQUARE D HEAVY DUTY
	NEW CONCEALED WIRING	PER NEC.
	LOW VOLTAGE WIRING FOR OCCUPANCY SWITCH AND POWER PACK.	PER NEC.
	UNSWITCHED LIGHTING CONDUCTOR	PER NEC.
	HOME RUN TO PANEL BOARD NUMBERS OF ARROW INDICATE CIRCUITS	PER NEC.
	120/208V 3Ø 4W PANEL BOARD - SEE PANEL SCHEDULES	SQUARE D NQ/H-LINE
	UTILITY METER BASE	SEE POWER RISER
E	EXISTING	

GENERAL NOTES - DEMOLITION


- THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR A COMPLETE ELECTRICAL DEMOLITION NOTED OR IMPLIED ON THESE PLANS.
- ALL ABANDONED AND UNUSED CABLES IN HOLLOW SPACES, VERTICAL SHAFTS, AND VENTILATION OR AIR-HANDLING DUCTS SHALL BE REMOVED PER NEC 725.25, 760.25, 770.25, 800.25, 820.25 AND 830.25.

GENERAL NOTES - RENOVATION

- PRIOR TO CONNECTING ANY NEW RECEPTACLES TO EXISTING CIRCUITS, THE ELECTRICAL CONTRACTOR SHALL FIELD VERIFY THAT NO MORE THAN 10 RECEPTACLES ARE CONNECTED TO A 20 AMP CIRCUIT. AFTER RECONNECTING ALL NEW AND RELOCATED LIGHT FIXTURES THE ELECTRICAL CONTRACTOR SHALL MEASURE THE CONNECTED LOAD FOR EACH LIGHTING CIRCUIT TO INSURE THAT NO MORE THAN 16 AMPS IS CONNECTED TO A 20 AMP CIRCUIT. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IF EITHER OF THE ABOVE CONDITIONS CAN NOT BE ACHIEVED.
- THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR MAINTAINING CIRCUIT CONTINUITY TO ALL LIGHTING DEVICES AND EQUIPMENT NOT SUBJECT TO REMOVAL. PROVIDE ADDITIONAL CONDUIT AND WIRING AS REQUIRED.
- RELOCATE AS NECESSARY ALL EXISTING CIRCUITS FOUND PASSING THROUGH THE AREA OF CONSTRUCTION, AND WHICH ARE PRESENTLY IN USE IN OTHER PARTS OF THE BUILDING UNAFFECTED BY THIS PROJECT PHASE, TO MAINTAIN THE CONTINUITY OF SERVICE AND GROUNDING, AND TO CONCEAL THEM ABOVE NEW CEILINGS.
- WHERE EXISTING EQUIPMENT AND DEVICES SHALL BE REMOVED, THE CONTRACTOR SHALL REMOVE ALL THE ASSOCIATED CONDUIT AND CONDUCTORS THAT SHALL NOT REMAIN IN OPERATION BACK TO THEIR RESPECTIVE SOURCE OR TO THE POINT ON A SHARED CIRCUIT FROM WHERE THE EQUIPMENT OR DEVICE IS SERVED.

GENERAL NOTES

- THE CONTRACTOR SHALL REFER TO THE ARCHITECTURAL PLANS FOR FLOOR PLAN DIMENSIONS, DO NOT SCALE THESE DRAWINGS.
- THE ELECTRICAL CONTRACTOR SHALL COORDINATE ANY AND ALL WORK WITH OTHER TRADES INVOLVED IN THE PROJECT, PRIOR TO THE INSTALLATION OF HIS EQUIPMENT SO AS TO AVOID CONFLICTS DURING CONSTRUCTION AND TO ALLOW FOR OPTIMUM MAINTENANCE AND WORKING SPACE.
- USE OF THE CONDUIT SYSTEM FOR EQUIPMENT GROUNDING SHALL NOT BE ACCEPTABLE. A SEPARATE GREEN GROUND WIRE SHALL BE RUN WITH THE CIRCUIT CONDUCTORS IN EACH CONDUIT.
- ALL BREAKER SIZES, SHOWN FOR MECHANICAL EQUIPMENT, SHALL BE VERIFIED BEFORE THE PURCHASE OR INSTALLATION OF SAID EQUIPMENT, WITH THE EQUIPMENT SUPPLIER AND THE MECHANICAL CONTRACTOR.
- ALL WORK AND MATERIAL SHALL BE PROVIDED IN ACCORDANCE WITH THE STATE, LOCAL AND NATIONAL CODES, ORDINANCES AND 2020 NATIONAL ELECTRICAL CODE (NFPA 70).
- EACH CONTRACTOR SHALL PROVIDE HIS OWN SUPPORT OF ALL DEVICES AND EQUIPMENT PROVIDED BY HIM AND SHALL SUPPORT SUCH EQUIPMENT PER APPROVED GOVERNING CODES OR PER APPROVAL OF THE ENGINEER. UNACCEPTABLE WORKMANSHIP OR MATERIALS SHALL BE REPLACED AT THE REQUEST OF THE ENGINEER AT THE CONTRACTOR'S EXPENSE.
- THE MOUNTING HEIGHTS AND LOCATIONS OF ALL WALL MOUNTED OUTLETS AND JUNCTION BOXES SHALL BE REVIEWED AND COORDINATED WITH THE ARCHITECT PRIOR TO INSTALLATION FOR USE WITH THE ACTUAL EQUIPMENT, CASEWORK, AND MILLWORK TO BE FURNISHED.
- THE ELECTRICAL CONTRACTOR SHALL PROVIDE ALL NECESSARY DISCONNECTS, SWITCHES, AND RECEPTACLES UNDER THE ELECTRICAL BID AND SHALL INCLUDE ALL NECESSARY CIRCUITS TO AND FINAL CONNECTIONS TO THE EQUIPMENT PROVIDED BY ALL SUPPLIERS. SEE DETAILS FOR CONNECTION TO EQUIPMENT PROVIDED BY MECHANICAL AND PLUMBING CONTRACTORS.
- PENETRATION:
 - WHERE ELECTRICAL EQUIPMENT PENETRATES RATED WALLS AND CEILINGS, EXTERIOR WALLS, THEY SHALL BE PROPERLY SEALED PER APPROVED UL METHODS.
 - WHERE ELECTRICAL EQUIPMENT PENETRATES EXTERIOR WALLS, THEY SHALL BE PROPERLY SEALED WITH METHODS APPROVED BY THE ENGINEER. SUBMIT DETAIL OF PROPOSED SEALING METHODS.
- ALL PERMITS AND INSPECTION FEES SHALL BE SECURED AND PAID BY THE ELECTRICAL CONTRACTOR.
- ALL WORK SHALL BE PERFORMED BY A LICENSED ELECTRICAL CONTRACTOR.
- THE CONTRACTOR SHALL PROVIDE COMPLETE UPDATED TYPEWRITTEN PANEL SCHEDULES FOR ALL PANELBOARDS.
- AS BUILT DRAWINGS SHALL BE GIVEN TO THE OWNER AT THE COMPLETION OF THE PROJECT.
- ALL WIRE SIZES INDICATED ON THE PANEL SCHEDULES ARE BASED ON 75 DEGREE COPPER THIN/THIN WIRE. ALL WIRE TERMINALS AND EQUIPMENT SHALL BE LISTED AND APPROVED FOR 75°C. ONLY THIN/2 WIRE SHALL BE INSTALLED IN WET AND EXTERIOR LOCATION.
- MINIMUM CONDUIT SIZE SHALL BE 1/2" AND MINIMUM WIRE SIZE SHALL BE #12 AWG.
- ARMORED CABLE (TYPE AC) AND METAL-CLAD CABLE (TYPE MC) ARE ACCEPTABLE WIRING METHODS SUBJECT TO THE FOLLOWING RESTRICTIONS:
 - SEE NEC 320 AND 330 FOR RESTRICTIONS.
 - PENETRATIONS OF RATED WALLS SHALL BE IN ACCORDANCE WITH APPROVED UL PENETRATION METHODS.
 - CABLE SHALL NOT BE USED FOR HOME RUN TO PANEL BOARD.
 - CABLE SHALL ONLY BE INSTALLED IN CONCEALED SPACE AND FURRED AREAS.
- THE MAXIMUM NUMBER OF HOMERUNS IN A CONDUIT SHALL NOT EXCEED THREE (3). FEEDING CIRCUITS WITH SHARED NEUTRAL SHALL BE SWITCHED TOGETHER.
- WHERE OUTLETS ARE SHOWN BACK TO BACK ON RATED WALLS, STAGGER OUTLETS SO THAT THEY ARE SEPARATED BY A MINIMUM OF 24".
- ALL DISCONNECTS SHALL HAVE SEPARATE NEUTRAL AND GROUND BARS.
- ALL PANELS SHALL BE THREE PHASE, FOUR WIRE UNLESS OTHERWISE NOTED.
- BOXES AND CONDUITS SHALL NOT BE INSTALLED RECESSED IN A 3-HOUR OR HIGHER RATED WALL, WHEN OUTLETS ARE INDICATED ON THESE WALLS, FIELD COORDINATE CONDUIT AND BOX INSTALLATION.
- THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR A COMPLETE ELECTRICAL DEMOLITION NOTED OR IMPLIED ON THESE PLANS.
- ALL ABANDONED AND UNUSED CABLES IN HOLLOW SPACES, VERTICAL SHAFTS, AND VENTILATION OR AIR-HANDLING DUCTS SHALL BE REMOVED PER NEC 725.25, 760.25, 770.25, 800.25, 820.25 AND 830.25.
- THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR MAINTAINING CIRCUIT CONTINUITY TO ALL LIGHTING, DEVICES AND EQUIPMENT NOT SUBJECT TO REMOVAL. PROVIDE ADDITIONAL CONDUIT AND WIRING AS REQUIRED.
- RELOCATE AS NECESSARY ALL EXISTING CIRCUITS FOUND PASSING THROUGH THE AREA OF CONSTRUCTION, AND WHICH ARE PRESENTLY IN USE IN OTHER PARTS OF THE BUILDING UNAFFECTED BY THIS PROJECT PHASE, TO MAINTAIN THE CONTINUITY OF SERVICE AND GROUNDING, AND TO CONCEAL THEM ABOVE NEW CEILINGS.
- WHERE EXISTING EQUIPMENT AND DEVICES SHALL BE REMOVED, THE CONTRACTOR SHALL REMOVE ALL THE ASSOCIATED CONDUIT AND CONDUCTORS THAT SHALL NOT REMAIN IN OPERATION BACK TO THEIR RESPECTIVE SOURCE OR TO THE POINT ON A SHARED CIRCUIT FROM WHERE THE EQUIPMENT OR DEVICE IS SERVED.

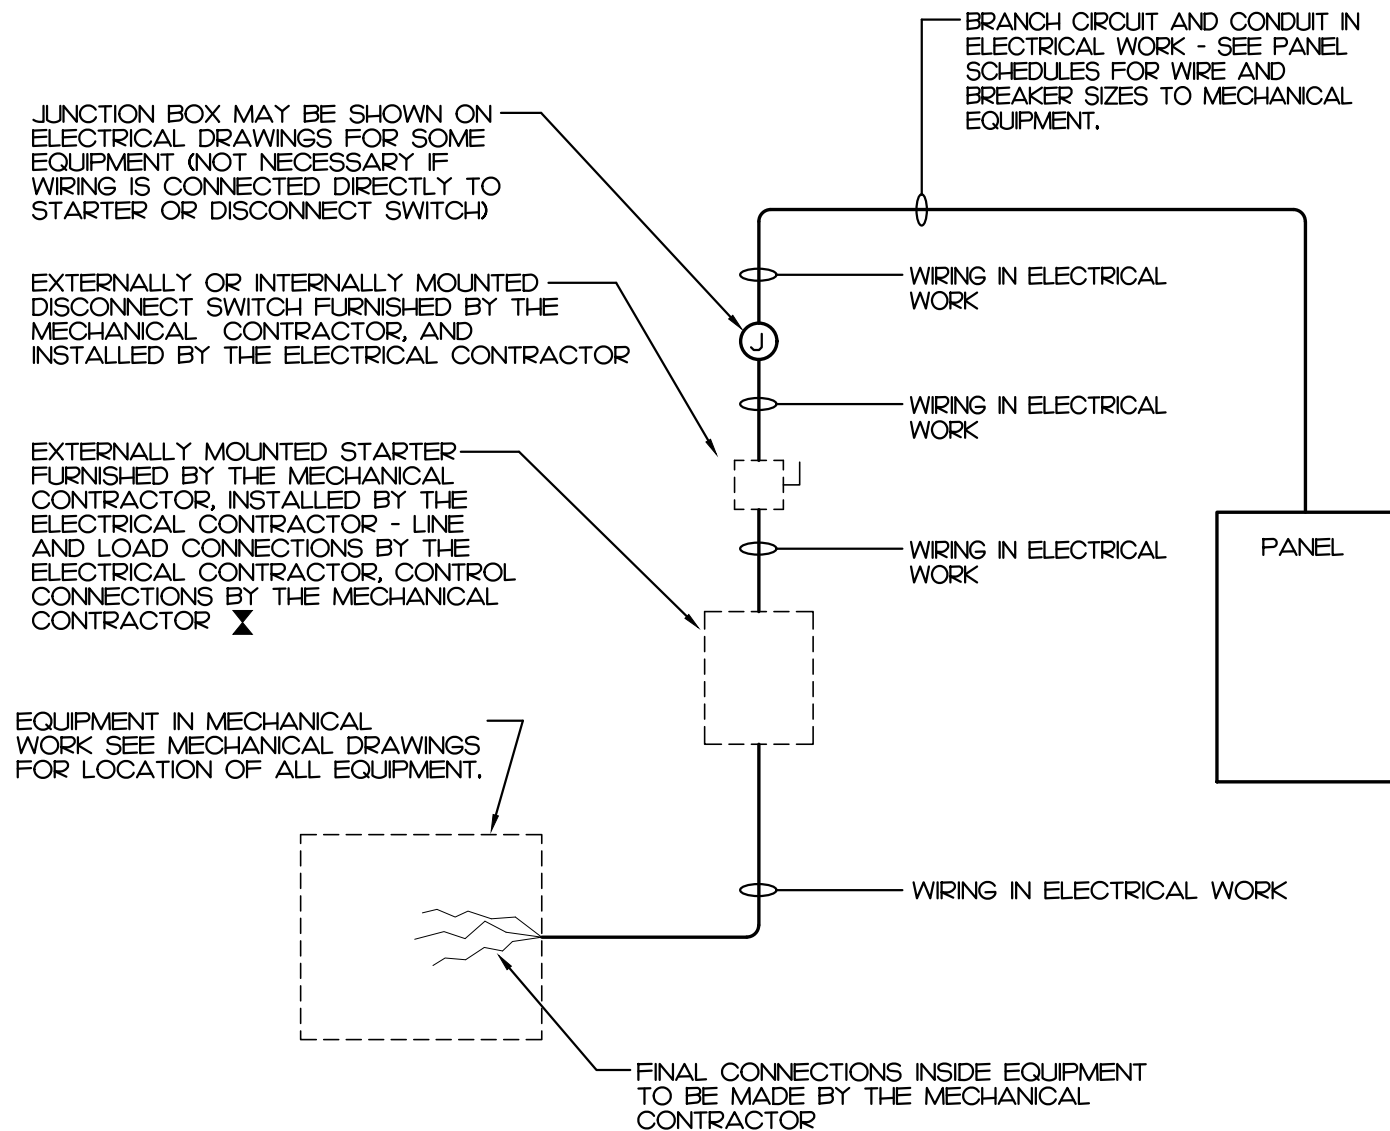

NOTES:

- A COMBINATION STARTER MAY BE USED IN LIEU OF A SEPARATE DISCONNECT SWITCH AND STARTER.
- E.C. SHALL FURNISH ALL REQUIRED FUSES.


PARTIAL, EXISTING, NO CHANGE

03 - WIRING TO MECHANICAL EQUIPMENT - DETAIL

SCALE: NO SCALE

KEY NOTES

- NEW PANEL BOARD. SEE PANEL SCHEDULE (BASE & ALTERNATE)
- SEE PANEL SCHEDULE FOR WIRE SIZE
- EXISTING PANEL BOARD. SEE PANEL SCHEDULE FOR DETAIL.

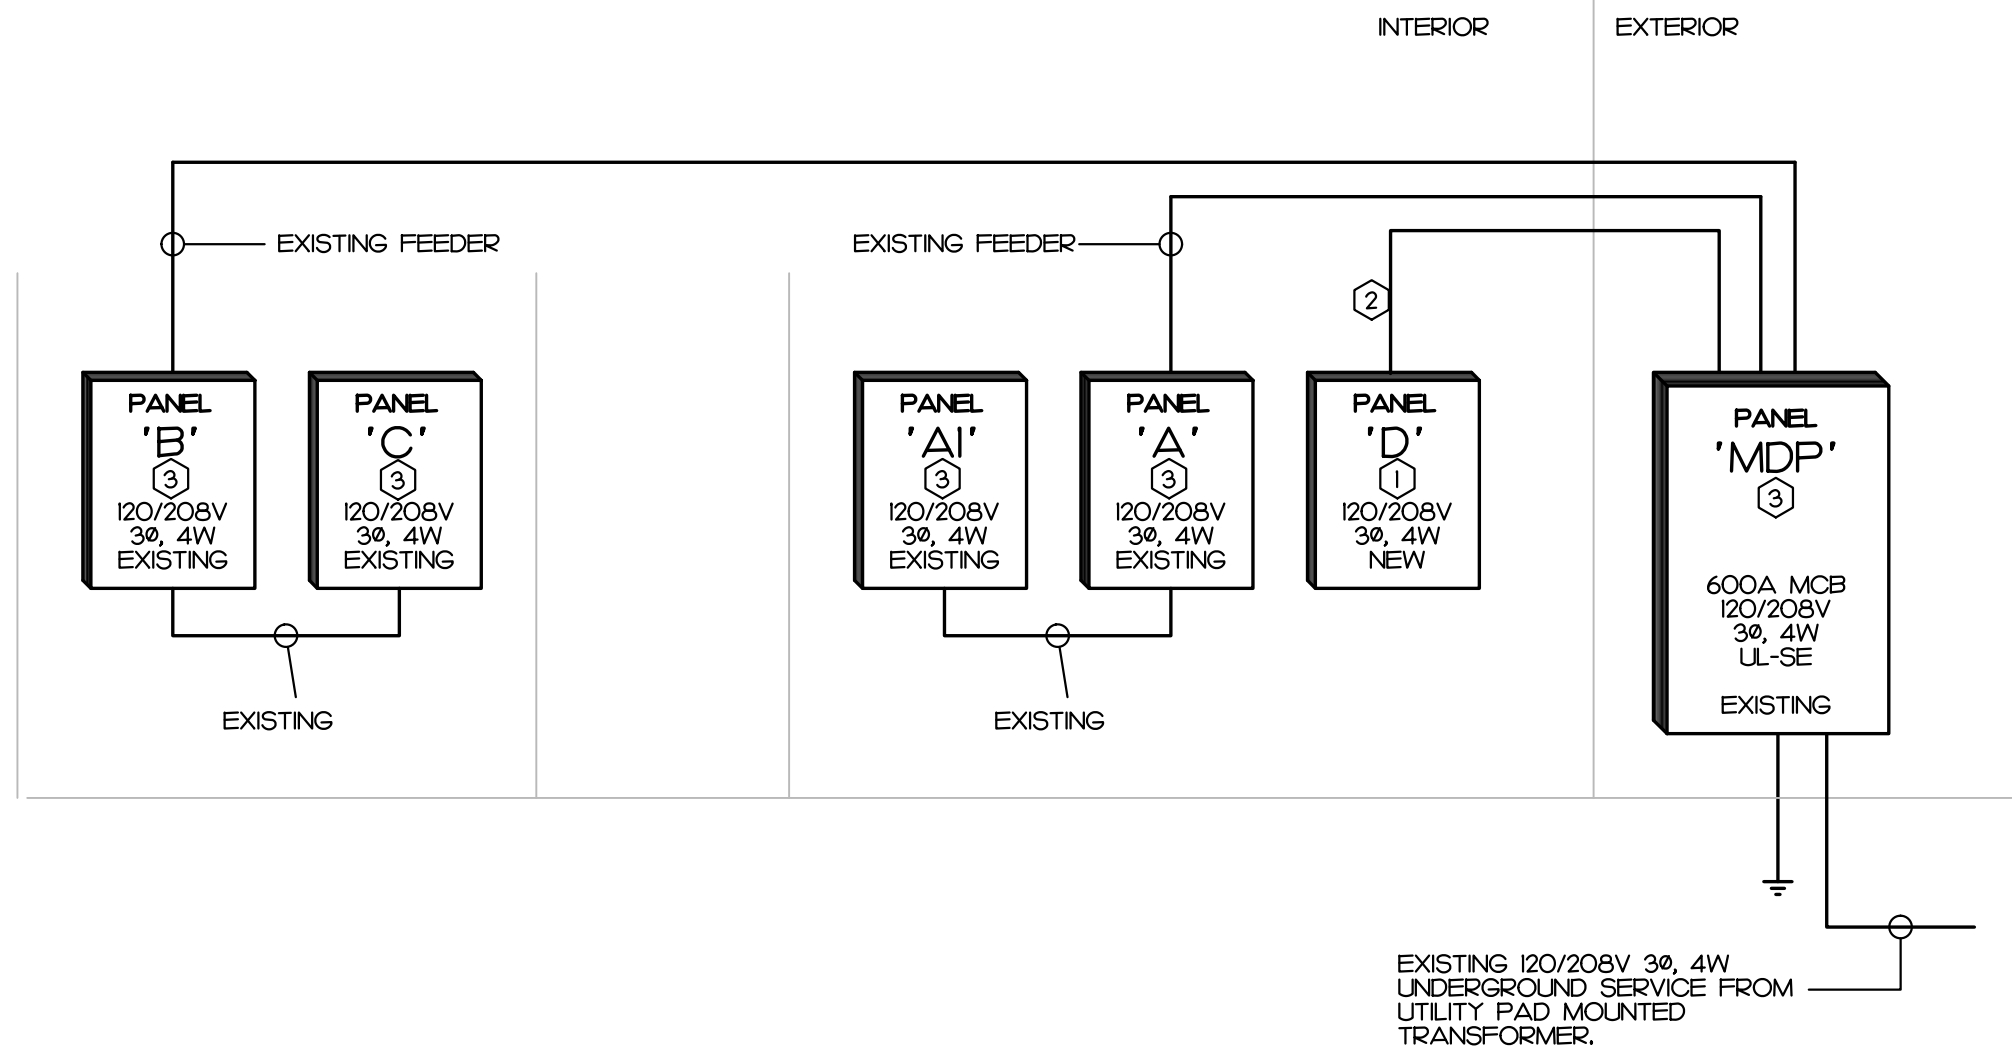


PARTIAL

01 - POWER RISER DIAGRAM

SCALE: NO SCALE

REVISIONS	

PROJECT NO.:
25007326.01

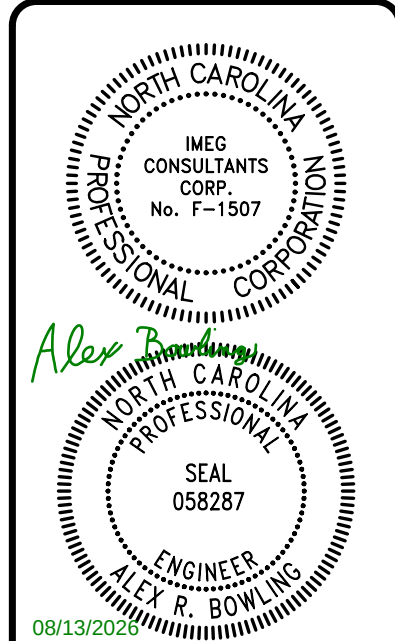

3221 BLUE RIDGE ROAD, SUITE 113
RALEIGH, NC 27612
PH: (919) 571-1111

HVAC RENOVATION
GREEN ROAD COMMUNITY CENTER GYM
4201 GREEN ROAD
RALEIGH NORTH CAROLINA

CONTENTS:
ELECTRICAL LEGEND,
NOTES, AND POWER
RISER

DATE:
AUGUST 13, 2026

DESIGNER: PEG
ENGINEER: ARB

SHEET NO.
E-1